
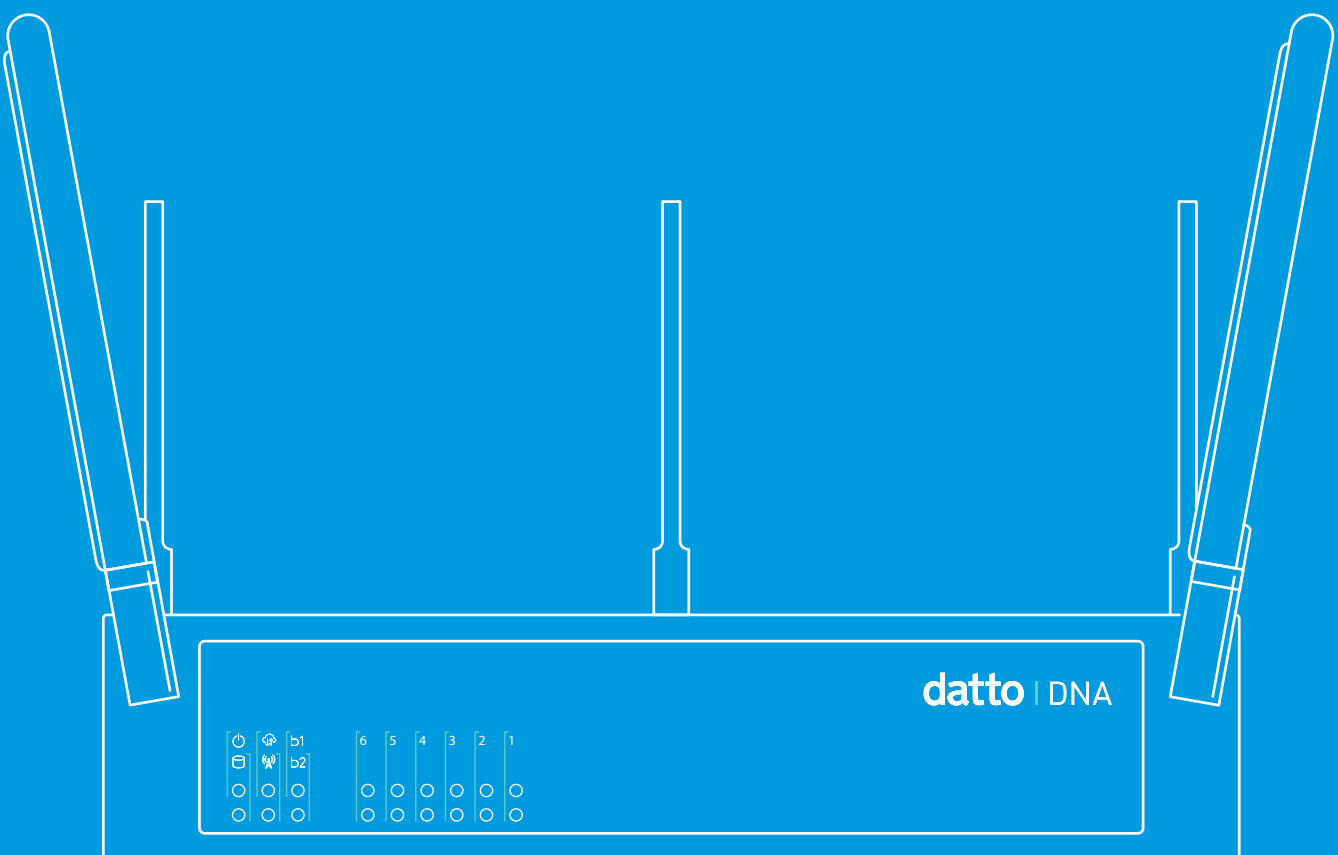


datto

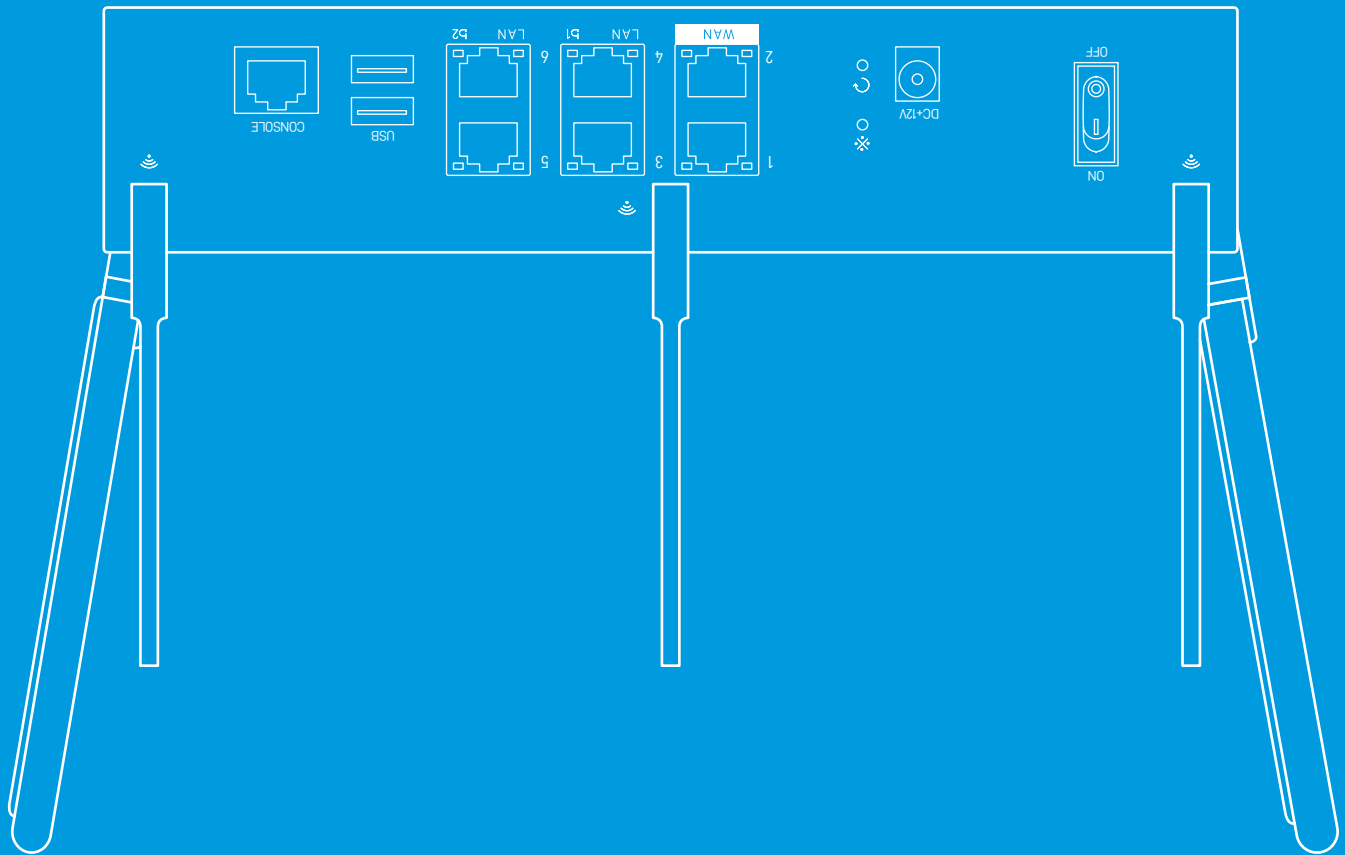


datto | DNA

QUICK START GUIDE

GETTING STARTED


1

Screw the antennas on to the corresponding Wi-Fi and LTE posts.

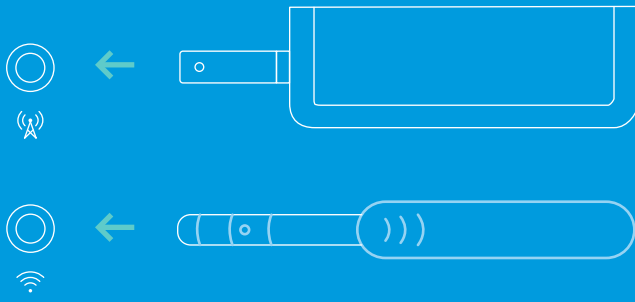


2

Plug the Ethernet cable from the ISP into Ethernet WAN port 1.

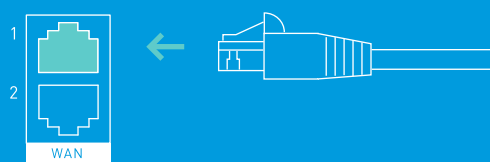

3

Plug in the 12V DC power supply into the DNA and power on the unit.




4

Check LTE signal strength.



5

Open your browser on any device to log in with your Partner Portal credentials.

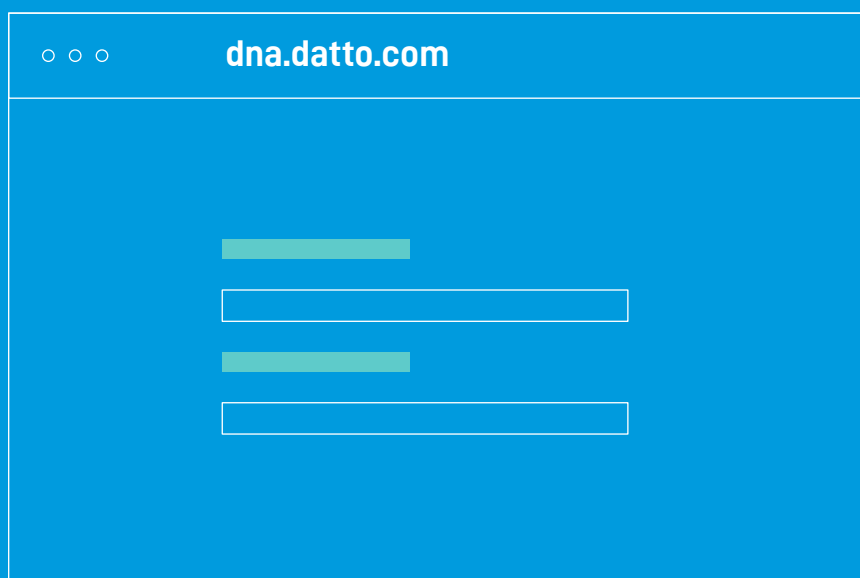

Need additional support? Check out our knowledge base at kb.datto.com or visit helpdesk.dattobackup.com to submit a support request.